

PLASTIC SPRING PLUNGER WITH NOTCH AND POM BALL



FILE STEP
available online



Version - M06
Original size - 4 mm

MATERIAL

Plastic body
POM ball
Compression spring 1.4310

VERSION

White ball.

NOTE


Spring plungers are used for indexing and positioning objects and also serve as tips and ejectors.

INDICATIONS

Quick indexing, positioning, and clamping of components.

AREAS OF APPLICATION

Machinery construction, plant construction, crafts, household.
Universal use.
Easy assembly.

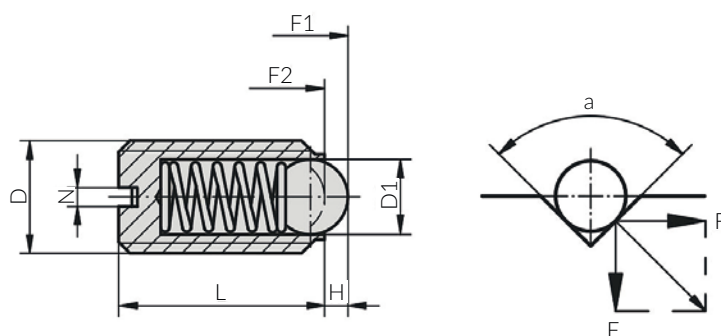

$$\begin{aligned} a=60^\circ, F' &= 1,732 \times F \\ a=90^\circ, F' &= F \\ a=120^\circ, F' &= 0,577 \times F \end{aligned}$$

COD.	D	L	D1	H	N	Elastic force beginning F1	Elastic force end F1
PRESPTOPLNM6400	M6	14	3,5	1	1	9	13
PRESPTOPLNM8600	M8	16	5	1,5	1,2	15	30
PRESPTOPLNM10900	M10	19	6	2	1,6	20	40

(mm)