



FILE STEP
available online

PLASTIC SPRING PLUNGER WITH NOTCH AND STAINLESS STEEL BALL



Version - M06
Original size - 4 mm

MATERIAL

Plastic body
Stainless steel ball 1.4034
Spring 1.4310

DESIGN

Hardened ball.

NOTE


Spring plungers are used for indexing
and positioning objects and also serve as
tips and ejectors.

INDICATIONS

Quick indexing, positioning
and clamping of components

AREAS OF USE

Machinery construction, plant
construction, crafts, household.
Universal use.
Easy assembly.

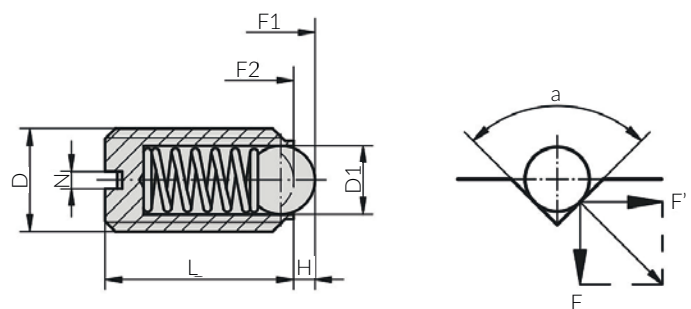

$$a=60^\circ, F' = 1,732 \times F$$

$$a=90^\circ, F' = F$$

$$a=120^\circ, F' = 0,577 \times F$$

COD.	D	L	D1	H	N	Elastic force beginning F1	Elastic force end F1
PRESATOPLNM6400	M6	14	3,5	1	1	9	13
PRESATOPLNM8600	M8	16	5	1,5	1,2	15	30
PRESATOPLNM10900	M10	19	6	2	1,6	20	40

(mm)