

SMOOTH SPRING PLUNGER IN STAINLESS STEEL WITH POM / STAINLESS STEEL BALL



FILE STEP
available online



Version - M06
Original size - 4 mm

MATERIAL

Stainless steel body and spring
Stainless steel or POM ball

VERSION


Untreated body.
Hardened, untreated ball.

INDICATIONS

Quick indexing, positioning, and
clamping of components

APPLICATION AREAS

Machinery construction, plant
construction, crafts, household
Universal use.
Easy assembly.

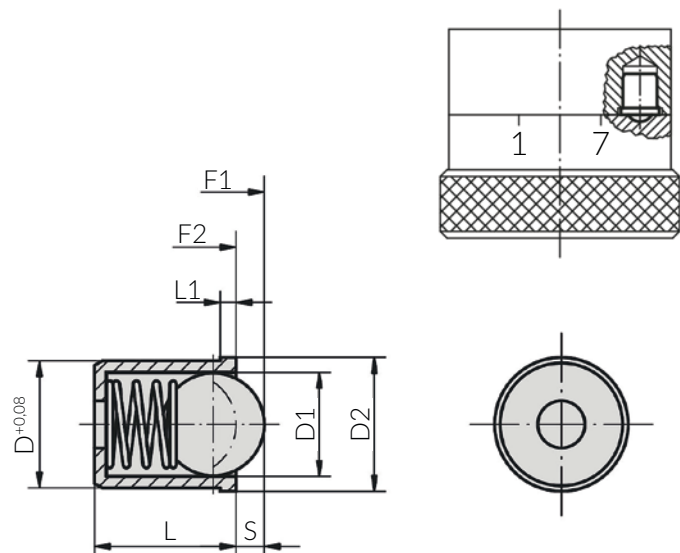

COD.	Mat. Comp.	D	L	D1	D2	H	L1	Elastic force beginning F1	Elastic force end F1
PRESA00AI0002300	stainless steel	2	3	1,5	2,5	0,6	0,4	1,2	2,5
PRESA00AI0003400	stainless steel	3	4	2,5	3,5	0,8	0,65	1,7	3,4
PRESA00AI004500	stainless steel	4	5	3	4,6	1	0,8	3	7
PRESA00AI005600	stainless steel	5	6	4	5,6	1	1	4	7
PRESA00AI006700	stainless steel	6	7	5	6,5	1	1,5	6	12
PRESA00AI008900	stainless steel	8	9	6,5	8,5	1	1,8	6	12
PRESA00AI010300	stainless steel	10	13,5	8	12	2,5	2,7	10	20
PRESA00AI012600	stainless steel	12	16	10	14	2,5	3,5	15	25
PRESP00AI004500	POM	4	5	3	4,6	1	0,6	3	7
PRESP00AI005600	POM	5	6	4	5,6	1	0,8	4	7
PRESP00AI006700	POM	6	7	5	6,5	1	1,3	6	12
PRESP00AI008900	POM	8	9	6,5	8,5	1	1,6	6	12
PRESP00AI010300	POM	10	13,5	8	12	2,5	2,6	10	20
PRESP00AI012600	POM	12	16	10	14	2,5	3,3	15	25

(mm)