

CLAMPING LEVERS

PERFECT FOR
EVERY APPLICATION.



Our range of levers is designed to meet a wide variety of industrial applications, offering custom solutions for your specific needs.



FIXED LEVER WITH BUSHING

Our fixed lever with bushing offers a reliable solution for fastening on rigid surfaces. Designed with an integrated bushing, it allows smooth and precise movement, ensuring a stable and secure hold. Made from durable materials such as stainless steel and special alloys, this lever ensures long-lasting performance even under the most demanding conditions.



FIXED LEVER WITH STUD

Our fixed lever with stud is designed for applications requiring direct fastening on a pin. With an intelligent design and robust construction, this lever ensures a secure and stable connection in a variety of industrial contexts. Available in different sizes and materials, it offers reliable and long-lasting performance.



CLAMPING LEVER WITH BUSHING

Our clamping lever with bushing offers a versatile solution for fastening on rigid surfaces or for connecting two movable elements. Equipped with an integrated bushing and a snap mechanism, it allows quick and secure installation while providing a stable and reliable hold. Made from high-quality materials, it is the ideal choice for applications requiring a lever with high precision and durability.



CLAMPING LEVER WITH STUD

Our clamping lever with stud offers an efficient solution for direct fastening on a stud. With a ratchet mechanism and an integrated stud, it ensures a quick and secure connection while providing a stable and reliable hold. Made from durable materials and available in various configurations, it offers optimal performance in a variety of industrial applications.

FIXED LEVER
WITH STUD



- material

GLASS-FIBER REINFORCED NYLON 6
- standard color

BLACK
- surface

SATIN
- insert


GALVANIZED STUD
- on request

• STAINLESS STEEL PIN
- alternative colors

• ORANGE RAL 2004
- BLUE RAL 5015
- YELLOW RAL 1021
- RED RAL 3000
- GREEN RAL 6024
- GREY RAL 7035
- BLACK RAL 9011



FILE STEP
available online

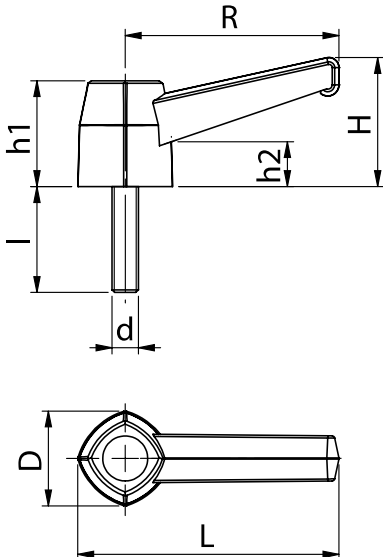

CODE __ (+I)	TYPE	D	R	L	H	d	__I	h1	h2	WEIGHT G
LEVFPZ0NFN40M4__	LFP/40 M4X10	18	40,4	49,5	24,5	M4	10 / 15 / 20 / 25	20	8,5	7,6
LEVFPZ0NFN40M5__	LFP/40 M5X10	18	40,4	49,5	24,5	M5	10 / 15 / 20 / 25	20	8,5	6,2
LEVFPZ0NFN40M6__	LFP/40 M6X10	18	40,4	49,5	24,5	M6	10 / 15 / 20 / 25	20	8,5	5,1
LEVFPZ0NFN60M6__	LFP/60 M6X10	22,4	59,3	70,5	34,5	M6	10 / 15 / 20 / 25 / 30 / 35 / 40 / 45 / 50	26,8	9	17,1
LEVFPZ0NFN60M8__	LFP/60 M8X10	22,4	59,3	70,5	34,5	M8	10 / 15 / 20 / 25 / 30 / 35 / 40 / 45 / 50	26,8	9	96,8
LEVFPZ0NFN80M8__	LFP/80 M8X10	28,7	82	96,5	45	M8	10 / 15 / 20 / 25 / 30 / 35 / 40 / 45 / 50	32	10,5	98,3
LEVFPZ0NFN8010__	LFP/80 M10X10	28,7	82	96,5	45	M10	10 / 15 / 20 / 25 / 30 / 35 / 40 / 45 / 50	32	10,5	98,6
LEVFPZ0NFN0012__	LFP/100 M12X30	35,7	99	117	56	M12	30 / 35 / 40 / 45 / 50 / 55 / 60 / 65 / 70	40	14	77,64
LEVFPZ0NFN0014__	LFP/100 M14X30	35,7	99	117	56	M14	30 / 35 / 40 / 45 / 50 / 55 / 60 / 65 / 70	40	14	117,8
LEVFPZ0NFN0016__	LFP/100 M16X30	35,7	99	117	56	M16	30 / 35 / 40 / 45 / 50 / 55 / 60 / 65 / 70	40	14	138,6

(mm)

FIXED LEVER WITH
THREADED BUSHING



- material

GLASS-FIBER REINFORCED NYLON 6
- standard color

BLACK
- surface

SATIN
- insert


BRASS BUSHING
- on request

• STAINLESS STEEL BUSHING
- GALVANIZED STEEL BUSHING
- alternative colors

• ORANGE RAL 2004
- BLUE RAL 5015
- YELLOW RAL 1021
- RED RAL 3000
- GREEN RAL 6024
- GREY RAL 7035
- BLACK RAL 9011



FILE STEP
available online

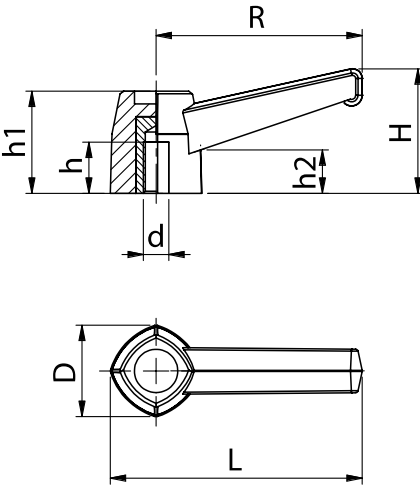

CODE	TYPE	D	R	L	H	d	h	h1	h2	WEIGHT G
LEVFBF0NFN40M400	LFB/40 M4	18	40,4	49,5	24,5	M4	8,5	20	8,5	13
LEVFBF0NFN40M500	LFB/40 M5	18	40,4	49,5	24,5	M5	8,5	20	8,5	13,2
LEVFBF0NFN40M600	LFB/40 M6	18	40,4	49,5	24,5	M6	8,5	20	8,5	15
LEVFBF0NFN60M600	LFB/60 M6	22,4	59,3	70,5	34,5	M6	13	26,8	9	16,2
LEVFBF0NFN60M800	LFB/60 M8	22,4	59,3	70,5	34,5	M8	13	26,8	9	17,3
LEVFBF0NFN601000	LFB/60 M10	22,4	59,3	70,5	34,5	M10	13	26,8	9	23,3
LEVFBF0NFN80M800	LFB/80 M8	28,7	82	96,5	45	M8	15	32	10,5	22,4
LEVFBF0NFN801000	LFB/80 M10	28,7	82	96,5	45	M10	15	32	10,5	26,3
LEVFBF0NFN801200	LFB/80 M12	28,7	82	96,5	45	M12	15	32	10,5	28,1
LEVFBF0NFN001200	LFB/100 M12	35,7	99	117	56	M12	19	40	14	64
LEVFBF0NFN001400	LFB/100 M14	35,7	99	117	56	M14	19	40	14	70
LEVFBF0NFN001600	LFB/100 M16	35,7	99	117	56	M16	19	40	14	82

(mm)

CLAMPING LEVER WITH
THREADED STUD



material
GLASS-FIBER REINFORCED NYLON 6


standard color
BLACK

surface
SATIN

insert
GALVANIZED STUD

on request
• STAINLESS STEEL PIN
• GALVANIZED STEEL BUSHING

alternative colors
• ORANGE RAL 2004
• BLUE RAL 5015
• YELLOW RAL 1021
• RED RAL 3000
• GREEN RAL 6024
• GREY RAL 7035
• BLACK RAL 9011

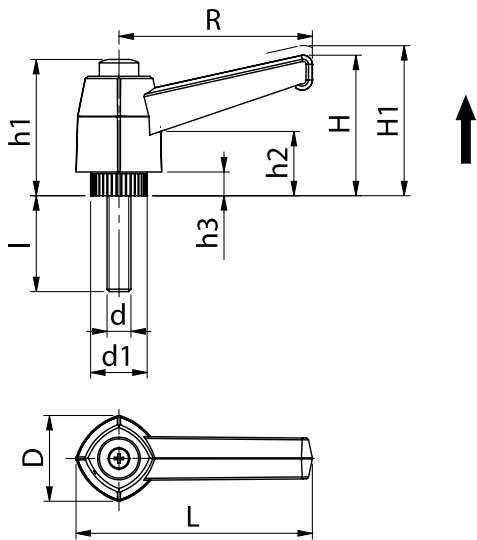

CODE __ (+I)	TYPE	D	R	L	H	d	__I	h1	h2	h3	d1	H1	WEIGHT G
LEVSPZ0NFN40M4__	LRP/40 M4X10	18	40,4	49,5	29,5	M4	10 / 15 / 20 / 25 / 30 / 35 / 40	28,5	13,5	5	11,8	33	6,4
LEVSPZ0NFN40M5__	LRP/40 M5X10	18	40,4	49,5	29,5	M5	10 / 15 / 20 / 25 / 30 / 35 / 40	28,5	13,5	5	11,8	33	7,2
LEVSPZ0NFN40M6__	LRP/40 M6X10	18	40,4	49,5	29,5	M6	10 / 15 / 20 / 25 / 30 / 35 / 40	28,5	13,5	5	11,8	33	7,4
LEVSPZ0NFN60M6__	LRP/60 M6X10	22,4	59,3	70,5	42,2	M6	10 / 15 / 20 / 25 / 30 / 35 / 40 / 45 / 50	38,3	16,7	7,7	13,8	45	19,6
LEVSPZ0NFN60M8__	LRP/60 M8X10	22,4	59,3	70,5	42,2	M8	10 / 15 / 20 / 25 / 30 / 35 / 40 / 45 / 50	38,3	16,7	7,7	13,8	45	30,1
LEVSPZ0NFN80M8__	LRP/80 M8X10	28,7	82	96,5	54,9	M8	10 / 15 / 20 / 25 / 30 / 35 / 40 / 45 / 50	47	20,4	9,9	18,6	60	35,75
LEVSPZ0NFN8010__	LRP/80 M10X10	28,7	82	96,5	54,9	M10	10 / 15 / 20 / 25 / 30 / 35 / 40 / 45 / 50	47	20,4	9,9	18,6	60	43,7
LEVSPZ0NFN8012__	LRP/80 M12X10	28,7	82	96,5	54,9	M12	10 / 15 / 20 / 25 / 30 / 35 / 40 / 45 / 50	47	20,4	9,9	18,6	60	45,8
LEVSPZ0NFN0012__	LRP/100 M12X10	35,7	99	117	68,2	M12	10 / 15 / 20 / 25 / 30 / 35 / 40 / 45 / 50	58,4	26,2	12,2	22,7	74,4	95,4
LEVSPZ0NFN0014__	LRP/100 M14X10	35,7	99	117	68,2	M14	10 / 15 / 20 / 25 / 30 / 35 / 40 / 45 / 50	58,4	26,2	12,2	22,7	74,4	95,8
LEVSPZ0NFN0016__	LRP/100 M16X10	35,7	99	117	68,2	M16	10 / 15 / 20 / 25 / 30 / 35 / 40 / 45 / 50	58,4	26,2	12,2	22,7	74,4	97,4

(mm)



FILE STEP
available online

CLAMPING LEVER WITH
THREADED BUSHING



material
GLASS-FIBER REINFORCED NYLON 6


standard color
BLACK

surface
SATIN

insert
BRASS BUSHING

on request
• STAINLESS STEEL BUSHING
• GALVANIZED STEEL BUSHING

alternative colors
• ORANGE RAL 2004
• BLUE RAL 5015
• YELLOW RAL 1021
• RED RAL 3000
• GREEN RAL 6024
• GREY RAL 7035
• BLACK RAL 9011

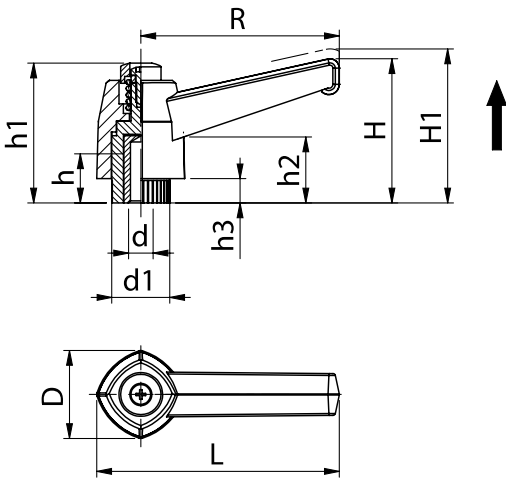

CODE	TYPE	D	R	L	H	d	h	h1	h2	h3	d1	H1	WEIGHT G
LEVSBF0NFN40M400	LRB/40 M4	18	40,4	49,5	29,5	M4	10	28,5	13,5	5	11,8	33	8
LEVSBF0NFN40M500	LRB/40 M5	18	40,4	49,5	29,5	M5	10	28,5	13,5	5	11,8	33	8,2
LEVSBF0NFN40M600	LFB/40 M6	18	40,4	49,5	29,5	M6	10	28,5	13,5	5	11,8	33	8,2
LEVSBF0NFN60M600	LRB/60 M6	22,4	59,3	70,5	42,2	M6	12	38,3	16,7	7,7	13,8	45	31
LEVSBF0NFN60M800	LRB/60 M8	22,4	59,3	70,5	42,2	M8	12	38,3	16,7	7,7	13,8	45	33
LEVSBF0NFN80M800	LRB/80 M8	28,7	82	96,5	54,9	M8	15	47	20,4	9,9	18,6	60	39
LEVSBF0NFN801000	LRB/80 M10	28,7	82	96,5	54,9	M10	15	47	20,4	9,9	18,6	60	45
LEVSBF0NFN801200	LRB/80 M12	28,7	82	96,5	54,9	M12	15	47	20,4	9,9	18,6	60	47
LEVSBF0NFN001200	LRB/100 M12	35,7	99	117	68,2	M12	15	58,4	26,2	12,2	22,7	74,4	57
LEVSBF0NFN001400	LRB/100 M14	35,7	99	117	68,2	M14	15	58,4	26,2	12,2	22,7	74,4	63
LEVSBF0NFN001600	LRB/100 M16	35,7	99	117	68,2	M16	15	58,4	26,2	12,2	22,7	74,4	75

(mm)



FILE STEP
available online

CLAMPING LEVER WITH
PUSH BUTTON AND THREADED STUD



material
GLASS-FIBER REINFORCED NYLON 6

standard color
BLACK


surface
SATIN

insert
GALVANIZED STUD

on request
• STAINLESS STEEL PIN

alternative colors
• ORANGE RAL 2004
• BLUE RAL 5015
• YELLOW RAL 1021
• RED RAL 3000
• GREEN RAL 6024
• GREY RAL 7035
• BLACK RAL 9011

- button color
- N BLACK STANDARD
 - A ORANGE RAL 2004
 - B BLUE RAL 5015
 - R RED RAL 3000

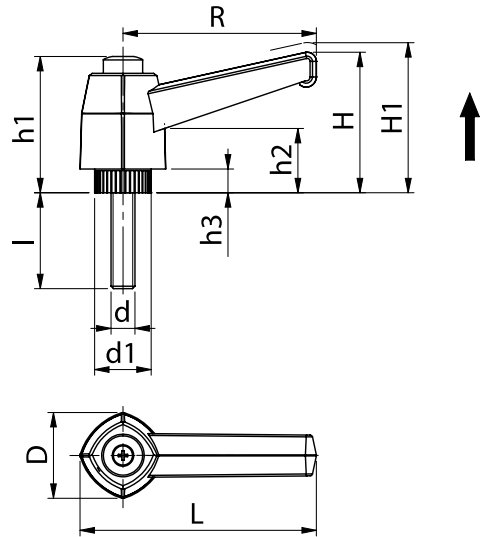

CODE __ (+Color) __ (+I)	TYPE	D	R	L	H	d	h1	h2	h3	d1	H1	__COL.	__I	WEIGHT G
LEVSPZ__NFN40M4__	LRP/40 M4X10	18	40,4	49,5	29,5	M4	28,5	13,5	5	11,8	33	N A B R	10 / 15 / 20 / 25 / 30 / 35 / 40	6,4
LEVSPZ__NFN40M5__	LRP/40 M5X10	18	40,4	49,5	29,5	M5	28,5	13,5	5	11,8	33		10 / 15 / 20 / 25 / 30 / 35 / 40	7,2
LEVSPZ__NFN40M6__	LRP/40 M6X10	18	40,4	49,5	29,5	M6	28,5	13,5	5	11,8	33		10 / 15 / 20 / 25 / 30 / 35 / 40	7,4
LEVSPZ__NFN60M6__	LRP/60 M6X10	22,4	59,3	70,5	42,2	M6	38,3	16,7	7,7	13,8	45		10 / 15 / 20 / 25 / 30 / 35 / 40 / 45 / 50	19,6
LEVSPZ__NFN60M8__	LRP/60 M8X10	22,4	59,3	70,5	42,2	M8	38,3	16,7	7,7	13,8	45		10 / 15 / 20 / 25 / 30 / 35 / 40 / 45 / 50	30,1
LEVSPZ__NFN80M8__	LRP/80 M8X10	28,7	82	96,5	54,9	M8	47	20,4	9,9	18,6	60		10 / 15 / 20 / 25 / 30 / 35 / 40 / 45 / 50	35,75
LEVSPZ__NFN8010__	LRP/80 M10X10	28,7	82	96,5	54,9	M10	47	20,4	9,9	18,6	60		10 / 15 / 20 / 25 / 30 / 35 / 40 / 45 / 50	43,7
LEVSPZ__NFN8012__	LRP/80 M12X10	28,7	82	96,5	54,9	M12	47	20,4	9,9	18,6	60		10 / 15 / 20 / 25 / 30 / 35 / 40 / 45 / 50	45,8
LEVSPZ__NFN0014__	LRP/100 M14X10	35,7	99	117	68,2	M14	58,4	26,2	12,2	22,7	74,4		10 / 15 / 20 / 25 / 30 / 35 / 40 / 45 / 50	95,8
LEVSPZ__NFN0016__	LRP/100 M16X10	35,7	99	117	68,2	M16	58,4	26,2	12,2	22,7	74,4		10 / 15 / 20 / 25 / 30 / 35 / 40 / 45 / 50	97,4

(mm)

CLAMPING LEVER WITH
PUSH BUTTON AND THREADED BUSHING



material
GLASS-FIBER REINFORCED NYLON 6

standard color
BLACK


surface
SATIN

insert
BRASS BUSHING

on request
• STAINLESS STEEL BUSHING
• GALVANIZED STEEL BUSHING

alternative colors
• ORANGE RAL 2004
• BLUE RAL 5015
• YELLOW RAL 1021
• RED RAL 3000
• GREEN RAL 6024
• GREY RAL 7035
• BLACK RAL 9011

- button color
- N BLACK STANDARD
 - A ORANGE RAL 2004
 - B BLUE RAL 5015
 - R RED RAL 3000

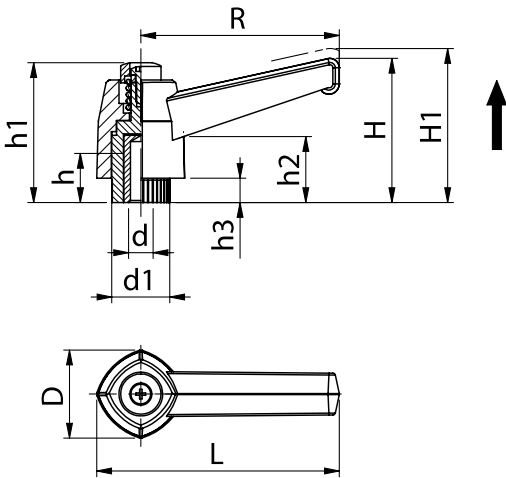

CODE __ (+Color)	TYPE	D	R	L	H	d	h	h1	h2	h3	d1	H1	WEIGHT G	__COL.
LEVSBF__NFN40M400	LRB/40 M4	18	40,4	49,5	29,5	M4	10	28,5	13,5	5	11,8	33	8	N A B R
LEVSBF__NFN40M500	LRB/40 M5	18	40,4	49,5	29,5	M5	10	28,5	13,5	5	11,8	33	8,2	
LEVSBF__NFN40M600	LFB/40 M6	18	40,4	49,5	29,5	M6	10	28,5	13,5	5	11,8	33	8,2	
LEVSBF__NFN60M600	LRB/60 M6	22,4	59,3	70,5	42,2	M6	12	38,3	16,7	7,7	13,8	45	31	
LEVSBF__NFN60M800	LRB/60 M8	22,4	59,3	70,5	42,2	M8	12	38,3	16,7	7,7	13,8	45	33	
LEVSBF__NFN80M800	LRB/80 M8	28,7	82	96,5	54,9	M8	15	47	20,4	9,9	18,6	60	39	
LEVSBF__NFN801000	LRB/80 M10	28,7	82	96,5	54,9	M10	15	47	20,4	9,9	18,6	60	45	
LEVSBF__NFN801200	LRB/80 M12	28,7	82	96,5	54,9	M12	15	47	20,4	9,9	18,6	60	47	
LEVSBF__NFN001200	LRB/100 M12	35,7	99	117	68,2	M12	15	58,4	26,2	12,2	22,7	74,4	57	
LEVSBF__NFN001400	LRB/100 M14	35,7	99	117	68,2	M14	15	58,4	26,2	12,2	22,7	74,4	63	
LEVSBF__NFN001600	LRB/100 M16	35,7	99	117	68,2	M16	15	58,4	26,2	12,2	22,7	74,4	75	

(mm)

ROUND ZAMAK SNAP LEVER WITH THREADED BUSHING



FILE STEP
available online




material
ZAMA

standard color
BLACK RAL 9011
ORANGE RAL 2004

surface
SMOOTH, EPOXY POWDER COATED

insert
GALVANIZED / BURNISHED

- alternative colors
- BLUE RAL 5015
 - YELLOW RAL 1021
 - RED RAL 3000
 - GREEN RAL 6024
 - GREY RAL 7035

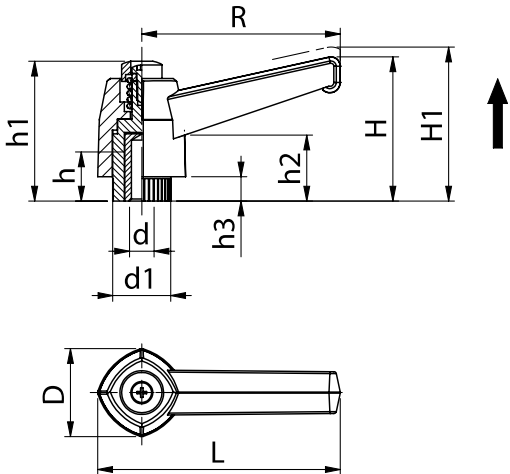

CODE __(+Color)	TYPE	D	H	h	L	M	P	__COL.
LEVSBA0AC__40M400	NM40/B M4	16	29	24	40	M4	10	N A
LEVSBA0AC__40M500	NM40/B M5	16	29	24	40	M5	10	
LEVSBA0AC__40M600	NM40/B M6	16	29	24	40	M6	10	
LEVSBA0AC__63M600	NM63/B M6	19	47	33	63	M6	13	
LEVSBA0AC__63M800	NM63/B M8	19	47	33	63	M8	13	
LEVSBA0AC__811000	NM81/B M10	25	65	43	81	M10	19	
LEVSBA0AC__811200	NM81/B M12	25	65	43	81	M12	19	
LEVSBA0AC__161200	NM106/B M12	32	74	53	106	M12	24	
LEVSBA0AC__161400	NM106/B M14	32	74	53	106	M14	24	
LEVSBA0AC__161600	NM106/B M16	32	74	53	106	M16	24	

(mm)

ROUND SNAP LEVER IN ZAMAK WITH PIN



FILE STEP
available online




material
ZAMA

standard color
BLACK RAL 9011
ORANGE RAL 2004

surface
SMOOTH, EPOXY POWDER COATED

insert
GALVANIZED / BURNISHED

- alternative colors
- BLUE RAL 5015
 - YELLOW RAL 1021
 - RED RAL 3000
 - GREEN RAL 6024
 - GREY RAL 7035

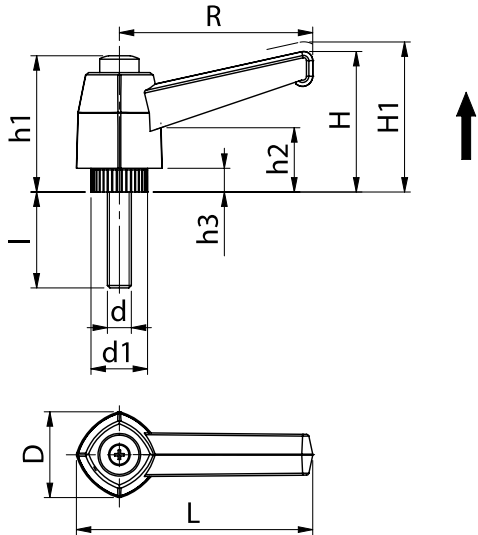

CODE __(+Color) __(+P)	TYPE	D	H	h	L	M	__COL.	__P
LEVSIA0AC__40M4__	GA44/P M4	16	29	24	40	M4	N A	20 / 30 / 40
LEVSIA0AC__40M5__	GA44/P M5	16	29	24	40	M5		10 / 15 / 20 / 25 / 30 / 35 / 40
LEVSIA0AC__40M6__	GA44/P M6	16	29	24	40	M6		10 / 20 / 25 / 30 / 35 / 50
LEVSIA0AC__63M6__	GA44/P M8	16	29	24	40	M8		20 / 30 / 40
LEVSIA0AC__63M6__	GA65/P M6	19	47	33	63	M6		20 / 30
LEVSIA0AC__63M8__	GA65/P M8	19	47	33	63	M8		10 / 20 / 30 / 35 / 40 / 50 / 60
LEVSIA0AC__8110__	GA65/P M10	25	65	43	81	M10		20 / 25 / 30 / 35 / 40 / 50 / 60 / 70 / 80
LEVSIA0AC__8112__	GA80/P M10	25	65	43	81	M12		20 / 25 / 30 / 35 / 40 / 50 / 60 / 70 / 80
LEVSIA0AC__1614__	GA94/P M14	32	74	53	106	M14		30 / 40 / 50 / 60 / 70
LEVSIA0AC__1616__	GA94/P M16	32	74	53	106	M16		30 / 40 / 50 / 60 / 70 / 80

(mm)

ROUND ZAMAK SNAP LEVER WITH THREADED BUSHING



FILE STEP
available online




material
ZAMA

standard color
BLACK RAL 9011
ORANGE RAL 2004

alternative colors
• **BLUE** RAL 5015
• **YELLOW** RAL 1021
• **RED** RAL 3000
• **GREEN** RAL 6024
• **GREY** RAL 7035

surface
SMOOTH, EPOXY POWDER COATED

insert
GALVANIZED / BURNISHED

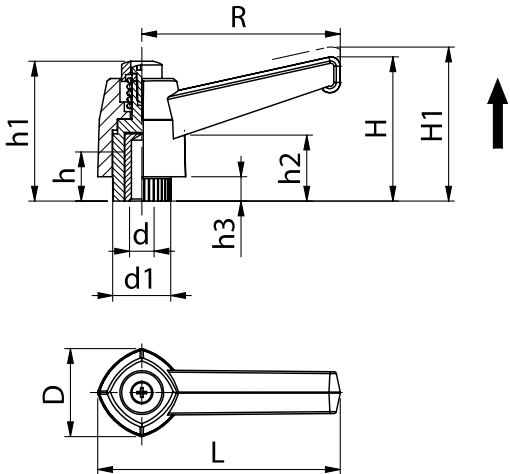

CODE __(+Color)	TYPE	D	H1	H	h	F	L	B	d	E	__COL.
LEVSBA0AC__44M400	GA44/B M4	9,5	36	23	5	21	44	52	M4	8	N A
LEVSBA0AC__44M500	GA44/B M5	9,5	36	23	5	21	44	52	M5	8	
LEVSBA0AC__44M600	GA44/B M6	9,5	36	23	5	21	44	52	M6	8	
LEVSBA0AC__65M600	GA65/B M6	11,5	47	33	10	28	65	75	M6	11	
LEVSBA0AC__65M800	GA65/B M8	11,5	47	33	10	28	65	75	M8	11	
LEVSBA0AC__801000	GA80/B M10	19	62	41	12	37	80	94	M10	18	
LEVSBA0AC__801200	GA80/B M12	19	62	41	12	37	80	94	M12	18	
LEVSBA0AC__941200	GA94/B M12	23	67	48	12	44	94	109	M12	24	
LEVSBA0AC__941400	GA94/B M14	23	67	48	12	44	94	109	M14	24	
LEVSBA0AC__941600	GA94/B M16	23	67	48	12	44	94	109	M16	24	

(mm)

SQUARE SNAP LEVER IN ZAMAK WITH PIN



FILE STEP
available online




material
ZAMA

standard color
BLACK RAL 9011
ORANGE RAL 2004

alternative colors
• **BLUE** RAL 5015
• **YELLOW** RAL 1021
• **RED** RAL 3000
• **GREEN** RAL 6024
• **GREY** RAL 7035

surface
SMOOTH, EPOXY POWDER COATED

insert
GALVANIZED / BURNISHED

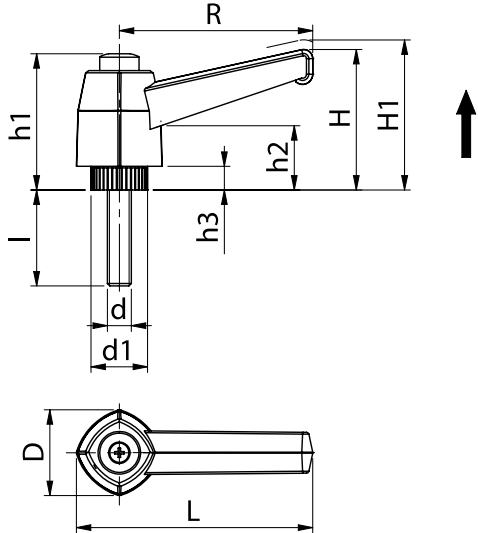


CODE __(+Color) __(+P)	TYPE	D	H	h	L	M	__COL.	__P
LEVSIA0AC__40M4__	NM40/P M4	16	29	24	40	M4	N A	20 / 30 / 40
LEVSIA0AC__40M5__	NM40/P M5	16	29	24	40	M5		10 / 15 / 20 / 25 / 30 / 35 / 40
LEVSIA0AC__40M6__	NM40/P M6	16	29	24	40	M6		10 / 20 / 25 / 30 / 35 / 50
LEVSIA0AC__40M8__	NM40/P M8	16	29	24	40	M8		20 / 30 / 40
LEVSIA0AC__63M6__	NM63/P M6	19	47	33	63	M6		20 / 30
LEVSIA0AC__63M8__	NM63/P M8	19	47	33	63	M8		10 / 20 / 30 / 35 / 40 / 50 / 60
LEVSIA0AC__8110__	NM81/P M10	25	65	43	81	M10		20 / 25 / 30 / 35 / 40 / 50 / 60 / 70 / 80
LEVSIA0AC__8112__	NM81/P M12	25	65	43	81	M12		20 / 25 / 30 / 35 / 40 / 50 / 60 / 70 / 80
LEVSIA0AC__1614__	NM106/P M14	32	74	53	106	M14		30 / 40 / 50 / 60 / 70
LEVSIA0AC__1616__	NM106/P M16	32	74	53	106	M16		30 / 40 / 50 / 60 / 70 / 80

(mm)

BURNISHED STEEL
CLAMPING LEVER



FILE STEP
available online

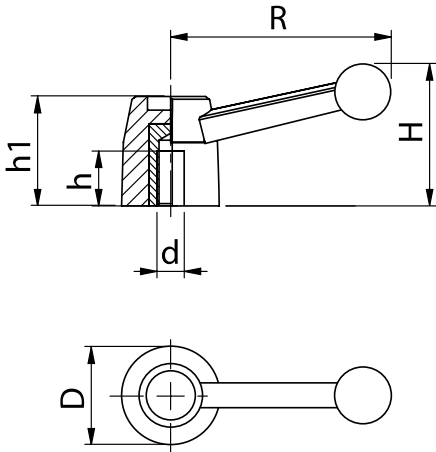

material
BURNISHED STEEL LEVER
/ BAKELITE SPHERE

CODE	TYPE	D	d	H	h1	R	d	h
LEVFB0ACN67M500	NTC60/B M5	16	10	40	25	67	M5	14
LEVFB0ACN67M600	NTC60/B M6	16	10	40	25	67	M6	14
LEVFB0ACN84M600	NTC80/B M6	22	14	53	32	84	M6	19
LEVFB0ACN84M800	NTC80/B M8	22	14	53	32	84	M8	19
LEVFB0ACN131000	NTC100/B M10	26	18	62	38	103	M10	21
LEVFB0ACN131200	NTC100/B M12	26	18	62	38	103	M12	21
LEVFB0ACN141400	NTC120/B M14	32	22	75	45	114	M14	24
LEVFB0ACN141600	NTC120/B M16	32	22	75	45	114	M16	24
LEVFB0ACN181600	NTC140/B M16	38	28	88	54	148	M16	30
LEVFB0ACN181800	NTC140/B M18	38	28	88	54	148	M18	30
LEVFB0ACN172000	NTC170/B M20	45	34	105	66	174	M20	40

(mm)

