



BASE, THREADED STEM WITH HEXAGONAL SEAT, NON-SLIP



FILE STEP
available online




base
**MADE OF BLACK REINFORCED
POLYAMIDE**

stem
**THREADED AND ARTICULATED
IN GALVANIZED STEEL**

non-slip disk
**IN 70 SHORE SBS THERMOPLASTIC
RUBBER**

special requests
inserts can be supplied in different
materials and lengths upon request

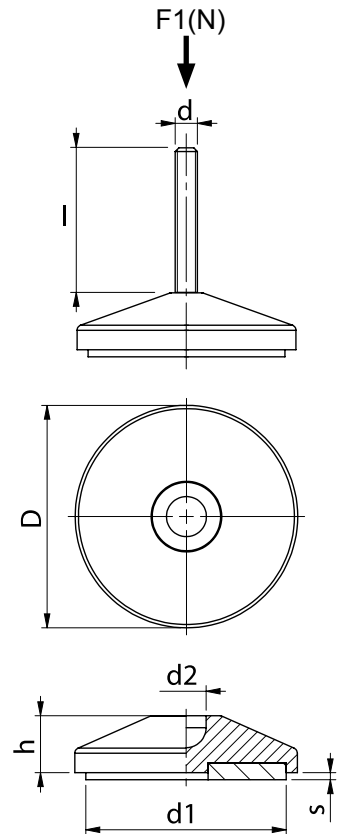

CODE __ (+l)	TYPE	d	D	h	d1	s	d2	F1(N)	__l
PIEBPSSNFN30M6__	Stem + Base + Non-Slip	M6	30	15,5	23,9	1,5	12,5	10.000	40 (cod. 40)
PIEBPSGZNN40M8__	Stem + Base + Non-Slip	M8	40	17	31,8	2	12,5	10.000	45 (cod. 45) 70 (cod. 70)
PIEBPSGZNN50M8__	Stem + Base + Non-Slip	M8	50	19	41,8	2	12,5	10.000	45 (cod. 45) 70 (cod. 70)
PIEBPSGZNN4010__	Stem + Base + Non-Slip	M10	40	17	31,8	2	12,5	10.000	45 (cod. 45) 70 (cod. 70) 100 (cod. 01)
PIEBPSGZNN5010__	Stem + Base + Non-Slip	M10	50	19	41,8	2	12,5	10.000	45 (cod. 45) 70 (cod. 70) 100 (cod. 01)
PIEBPSGZNN8010__	Stem + Base + Non-Slip	M10	80	20,5	72	2,5	12,5	13.000	45 (cod. 45) 70 (cod. 70) 100 (cod. 01)
PIEBPSGZNN4012__	Stem + Base + Non-Slip	M12	40	17	31,8	2	12,5	10.000	45 (cod. 45) 70 (cod. 70) 100 (cod. 01)
PIEBPSGZNN5012__	Stem + Base + Non-Slip	M12	50	19	41,8	2	12,5	10.000	45 (cod. 45) 70 (cod. 70) 100 (cod. 01)
PIEBPSGZNN8012__	Stem + Base + Non-Slip	M12	80	20,5	72	2,5	12,5	13.000	45 (cod. 45) 70 (cod. 70) 100 (cod. 01)

(mm)