



FILE STEP
available online

SMOOTH SPRING PLUNGER IN PLASTIC WITH POM / STAINLESS STEEL BALL



Version - M06
Original size - 4 mm

MATERIAL

Thermoplastic resin body
Stainless steel spring
Stainless steel or POM ball

VERSION

Black body.
Hardened, untreated ball.

INDICATIONS


Quick indexing, positioning, and
clamping of components

APPLICATION AREAS

Machinery construction, plant
construction, crafts, household use.

UNIVERSAL USE.

Easy assembly.

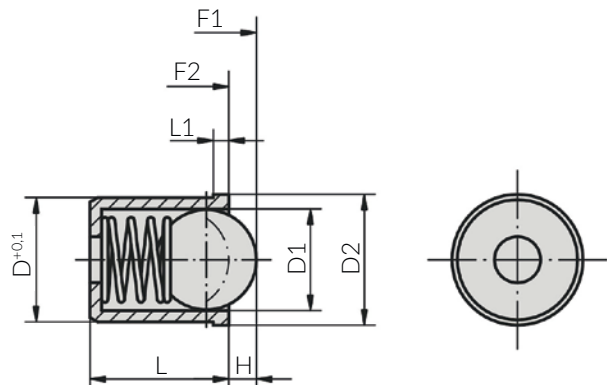

COD.	Mat. Comp.	D	L	D1	D2	H	L1	Elastic force beginning F1	Elastic force end F1
PRESA00PLN04500	stainless steel	4	5	3	4,6	0,7	1	3	7
PRESA00PLN05600	stainless steel	5	6	4	5,6	1	1	4	7
PRESA00PLN06700	stainless steel	6	7	5	6,5	1,5	1	6	12
PRESA00PLN08900	stainless steel	8	9	6,5	8,5	1,8	1	6	12
PRESA00PLN10300	stainless steel	10	13,5	8	12	2,7	2,5	10	20
PRESA00PLN12600	stainless steel	12	16	10	14	3,5	2,5	15	25
PRESP00PLN04500	POM	4	5	3	4,6	0,7	1	3	7
PRESP00PLN05600	POM	5	6	4	5,6	1	1	4	7
PRESP00PLN06700	POM	6	7	5	6,5	1,5	1	6	12
PRESP00PLN08900	POM	8	9	6,5	8,5	1,8	1	6	12
PRESP00PLN10300	POM	10	13,5	8	12	2,7	2,5	10	20
PRESP00PLN12600	POM	12	16	10	14	3,5	2,5	15	25

(mm)